Unimat Traffic®

Specifications

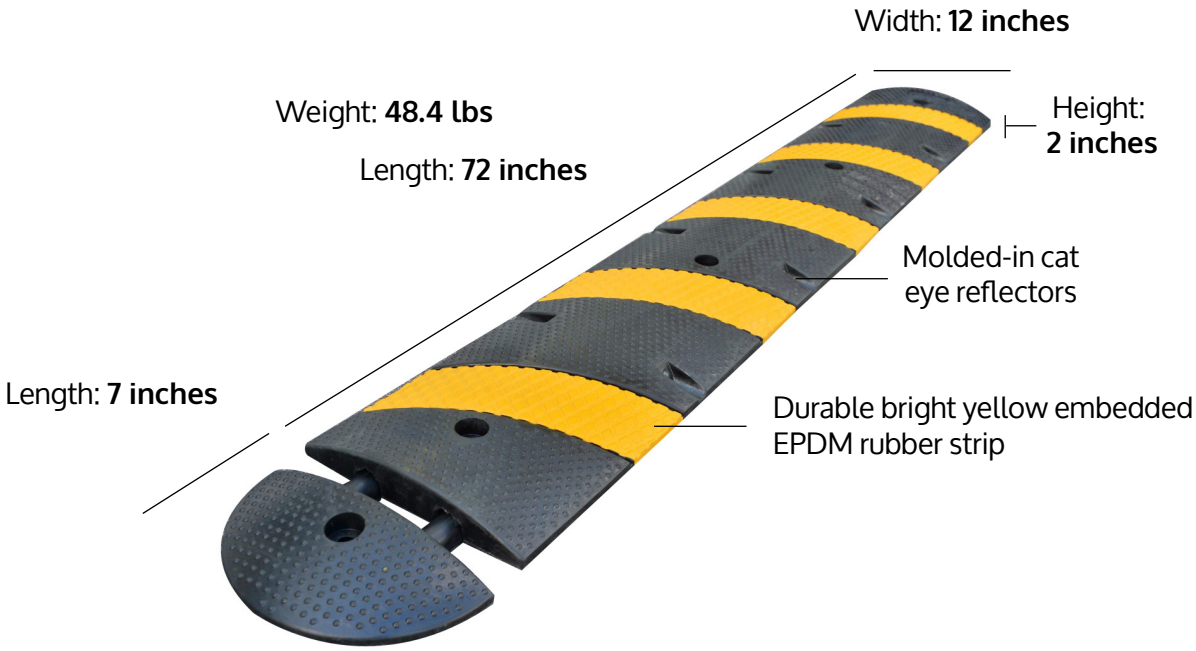

MOUNTING HARDWARE

14" Steel Spike
Asphalt

5" Expansive Screw
Concrete

FEATURES

Fitting Holes:	Middle: 4 holes x ½'' Diameter End Cap: 2 Holes x ½'' Diameter
Weight:	Middle Piece is 48.4 lbs and End Cap is 3.5 lbs
Bearing Capacity:	44000 lbs Truck
Reflector:	5 pcs 12'' x 4'' EPDM Rubber
Warranty:	A 2 year warranty on the product and 1 year warranty on the tape
Range of Temperature:	- 67 °F to + 131 °F
Materials:	Compression molded 80% recycled rubber and 20% Virgin Rubber

- Free hardware included for asphalt or concrete installation
- Build your own system with 6 ft. sections and 7" end caps
- Molded-in cat eye reflectors and bright Yellow EPDM rubber offer high visibility
- Slows vehicles to 5 MPH
- Speed bump system comes in 6 ft., 7 ft., 13 ft., 19 ft. and 25 ft. sizes
- Easy to install, easy removal for storage or relocation
- It can be used as a 2-channel cable protector and as a speed bump
- Durable bright yellow embedded EPDM rubber strip
- It has 4 mounting holes for permanent installation on asphalt or concrete ground

SKU	Description	Mount Type	Hardware	Lenght	Height	Width	Weigth	Installation Surface
SB206FT	6 Foot Speed Bump (1) 6' Section - With no End Caps	Surface	Included	72"	2"	12"	48.4	Asphalt / Concrete
SB207FT	7 Foot Speed Bump (1) 6' Section + (2) End Caps	Surface	Included	86"	2"	12"	55.4	Asphalt / Concrete
SB213FT	13 Foot Speed Bump (2) 6' Section + (2) End Caps	Surface	Included	158"	2"	12"	103.8	Asphalt / Concrete
SB219FT	19 Foot Speed Bump (3) 6' Section + (2) End Caps	Surface	Included	230"	2"	12"	152.2	Asphalt / Concrete
SB225FT	25 Foot Speed Bump (4) 6' Section + (2) End Caps	Surface	Included	302"	2"	12"	200.6	Asphalt / Concrete
SB2ECAP	End Cap	Surface	Included	7"	2"	12"	3.5	Asphalt / Concrete

** Hardware included, when ordering please specify the installation surface: concrete or asphalt.*

Unimat Industries, LLC
6980 NW 43rd Street, Miami, FL 33166
Phone: (305) 716-0358
Fax: (305) 716-2856
Toll Free: 1-855-864-6281